


Double A
Hydraulics



®

WQ-005
reducing/relieving valve
pilot operated,
subplate mounted




536 TOWNSHIP LINE ROAD
FLUID TECHNOLOGY ANNEX
BLUE BELL, PENNSYLVANIA 19422
Tel: 215.643.0617
Fax: 216.643.4017
sales@doubleahydraulics.com
www.doubleahydraulics.com

3000 psi, 10 gpm


TECHNICAL DATA

- Pilot-operated Pressure Reducing/Relieving Valve
- NFPA D03 Subplate Interface
- Reduced Pressure on T, Drain to A
- Adjustable Setting: 75-3000 PSI
- Capacity: 10 GPM
- Control Pilot Flow: 7-10 Cubic Inches/Min
- Locknut Torque 80-90 lbf-in
- Body Material: T6061-T6 Aluminum, Uncoated
- Buna Seals

PRESSURE DROP DATA

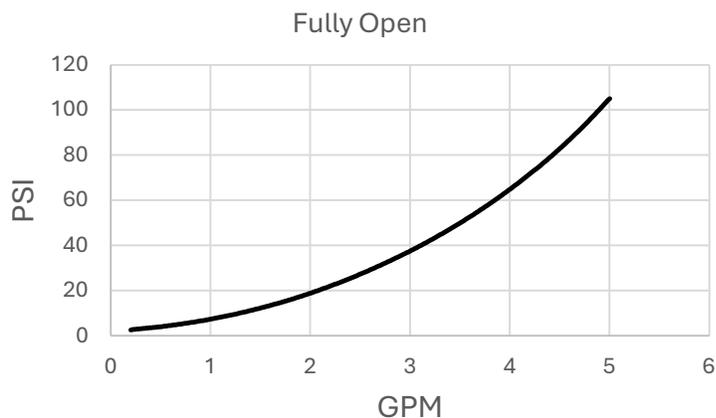

DIMENSIONS

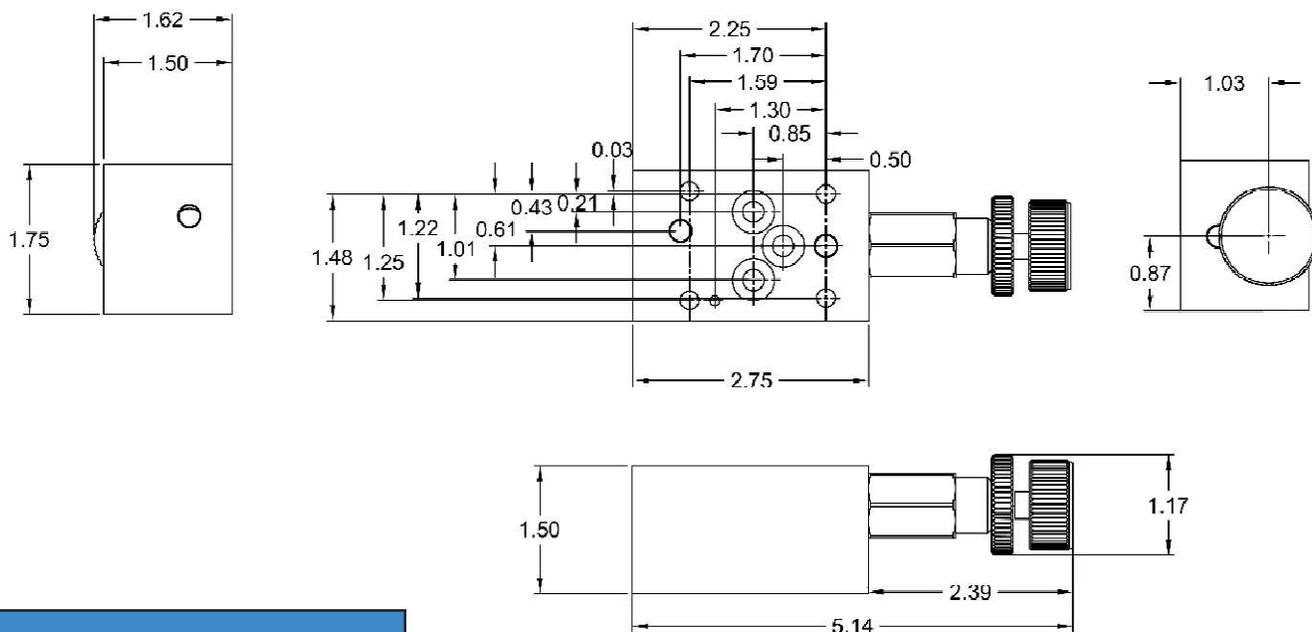

ORDERING INFORMATION

